

SOCKET WRENCHES 3/4"



EGA Master offers a wide range of socket wrenches, both in short and long series, while also providing a large number of complementary items such as adapters, flexible handles, extensions, ratchet wrenches, etc.

It offers ranges of 1/4", 3/8", 1/2", 3/4" and 1" drive square in manual sockets and 3/8", 1/2", 3/4", 1", 1.1/2" and 2.1/2" in impact sockets, being the only ones in the industry with such an extensive range.

Both in mm and inches!



1. Manufactured in chrome-vanadium, they are designed to withstand high torque with minimal wear, providing greater durability.

2. With a hardness of 44 HRc.




TECHNICAL CHARACTERISTICS

MATERIAL	Cr-V
MINIMUM HARDNESS	44 HRc
FINISH	Chrome-plated

STANDARD SOCKET WRENCHES

■ MM




COD.	AF mm	L (mm)	A (mm)	B (mm)	C (mm)	Pt	g		
60501	19		30	33					
60502	21		32		14	210			
60503	22								
60504	23		33		15				
60505	24		34						
60506	25	50		36	17	220			
60507	26		36						
60508	27		38						
60509	28		39			230	10		
60510	29		40		24	250			
60511	30		42			290			
60512	32		44	38	26	300			
60513	33	x	46		28	330			
60514	34	55			26				
60515	35		48		28	390			
60516	36			42	29	420			
60517	38		50			470			
60518	40	60		43	31	500			
60519	41	65	55			550			
60520	42			45	34				
60521	46	70	60		37	650			
60522	50		70		38	850	5		
60525	54	75			40				
60523	55		75	48	41	1000			
60524	60	80	80			1100			
60546	65	82	82		45	1350			

○ I DIN 3124

FEATURES

Cr-V

■ INCH

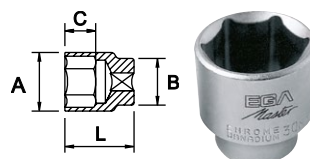

COD.	AF inch	L (mm)	A (mm)	B (mm)	C (mm)	Pt	g		
67595	7/8		33			210			
67596	15/16				17				
67597	1	50	35	36		220			
67598	1.1/16		38		24				
67599	1.1/8		40		27	270			
67601	1.1/4		44	38	28	290	10		
67602	1.5/16	55	46	39	29	310			
67603	1.3/8		48			350			
67604	1.7/16	60		42	30	400			
67605	1.1/2		50			460			
67607	1.5/8		55	45	32				
67608	1.11/16	65			34	550			
67610	1.13/16		60	47	35	700	5		
67612	2	70	70	48	41	850			


○ I DIN 3124

FEATURES

Cr-V

STANDARD SOCKET WRENCHES

■ MM




COD.	AF mm	L (mm)	A (mm)	B (mm)	C (mm)	Pt	g		
67565	19		30	33					
67566	21		32		14	210			
67567	22								
67568	23		33		15				
67569	24	50	34	36					
67570	25		36		17	220			
67571	26								
67572	27		38					10	
67573	29		40		24	250			
67574	30		42			290			
67575	32		44	38	26	300			
67576	33	x	46		28				
67577	34	55	48		26	330			
67578	35		48	42	28	390			
67579	36		50		29	420			
67580	38			43	31	470			
67581	40	60				500			
67582	41		55						
67583	42	65		45	34	550			
67584	44		60		37	600			
67585	46	70				650		5	
67586	50		70	48	38	850			
67587	54	75	75						
67588	55				40	1000			

● I DIN 3124

FEATURES

Cr-V

■ INCH



COD.	AF inch	L (mm)	A (mm)	B (mm)	C (mm)	Pt	g		
60526	3/4		30						
60527	7/8		33			210			
60528	15/16	50	35	36	17				
60529	1					220			
60530	1.1/16		38		24				
60531	1.1/8		40		27				
60500	1.3/16		42	38	25	270		10	
60532	1.1/4	55	44		28	290			
60533	1.5/16		46	39	29	310			
60534	1.3/8		48			350			
60535	1.7/16	60	50		30	400			
60536	1.1/2					460			
60537	1.5/8		55		32				
60538	1.11/16			45	34	550			
60499	1.3/4	65	60						
60539	1.13/16			47	35	700		5	
60540	1.7/8	70	65	48	39				
60541	2		70		41	850			


● I DIN 3124

FEATURES

Cr-V

LONG SERIES SOCKET WRENCHES

MM

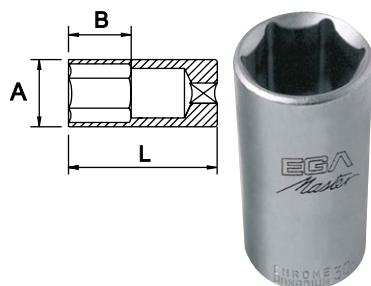


COD.	AF mm	L (mm)	A (mm)	B (mm)	Pt	g		
56900	19		29			300		
56901	21		31			320		
56902	22		32	26		360		
56903	23		33			380		
56904	24		34			400	10	
56905	26		37					
56906	27		38			420		
56899	x 28	90			6			•
56907	29		40	28		460		
56908	30		42			510		
56909	32		44			560		
56910	34		47			610	5	
56911	36		50	30		670		
56912	38		52			700		
56913	41		56	34		790		

• DIN 3124

FEATURES

Cr-V

INCH

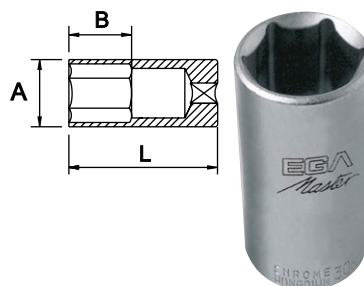

COD.	AF inch	L (mm)	A (mm)	B (mm)	Pt	g		
56914	3/4		29			300		
56915	7/8		32			360		
56916	15/16		34	26		400	10	
56917	1		37			410		
56918	y 1.1/16	90	38		6	420		•
56919	1.1/8		40	28		460		
56920	1.1/4		44			560		
56921	1.3/8		48	30		640	5	
56922	1.1/2		52			700		
56923	1.5/8		56	34		790		

• DIN 3124

FEATURES


Cr-V

ADAPTER

COD.	AF inch	AF inch	g		
65883	3/4-1		250		
65886	3/4-1/2"		135	6	•



REVERSIBLE RATCHET HANDLE



COD.	AF inch	L (mm)	A (mm)	B (mm)	C (mm)	Kg
61859	3/4	500	69	25	58	2,2

DIN 3122



SWIVEL HANDLE

COD.	AF inch	L (mm)	Kg	
61473	3/4	1000	3,7	6



x 50% aerospace chrome-plated - 50% mirror polished chrome
y 100% mirror polished chrome

SWIVEL HANDLE

COD.	AF inch	L (mm)	Kg	
61456	3/4	480	1,9	6



SLIDING "T" HANDLE

COD.	AF inch	L (mm)	g	
61864	3/4	450	1200	5

DIN 3122



UNIVERSAL JOINT

COD.	AF inch	g		
61860	3/4	600	6	•

DIN 3123



EXTENSION

COD.	AF inch	L (inch)	g		
61865	3/4	4	410	5	•
63910		5	480		
61866		8	700		
63911		12	1050		
63912		16	1300		
63913		20	1650		



SOCKET SETS

■ 14 PCS.

COD.	AF inch	PCS.		Kg
61861	3/4	14	STANDARD SERIES	12

PCS./UN.	Composition	Description		
10	60503, 60505, 60508, 60511, 60512, 60516, 60517, 60519, 60521, 60522	Socket wrenches	22-24-27-30-32-36-38-41-46-50 mm	-
1	61859	Ratchet	-	
2	61865, 61866	Extension bar	4"-8"	
1	61864	T-handle	-	



COD.	AF inch	PCS.		Kg
61862	3/4	14	STANDARD SERIES	12

PCS./UN.	Composition	Description		
10	60527, 60528, 60529, 60531, 60532, 60535, 60536, 60537, 60539, 60541	Socket wrenches	7/8"-15/16"-1"-1.1/8"-1.1/4"-1.7/16"-1.1/2"-1.5/8"-1.13/16"-2"	-
1	61859	Ratchet	-	
2	61865, 61866	Extension bar	4"-8"	
1	61864	T-handle	-	

DISPLAYS

86 PCS.

COD.	AF inch	PCS.		Kg
65300	3/4	86	STANDARD SERIES	38

PCS./UN.	Composition	Description	
35	60501, 60503, 60505, 60507, 60508		19-22-24-26-27 mm
18	60510, 60511, 60512		29-30-32 mm
25	60514, 60515, 60516, 60517, 60519	Socket wrenches	34-35-36-38-41 mm
8	60521, 60522		46-50 mm

COD.	AF inch	PCS.		Kg
65301	3/4	86	STANDARD SERIES	39

PCS./UN.	Composition	Description	
14	60527		7/8"
21	60528, 60529, 60530		15/16"-1"-1.1/16"
6	60531		1.1/8"
12	60532		1-1/4"
25	60533, 60534, 60535, 60536, 60537	Socket wrenches	1.5/16"-1.3/8"-1.7/16"-1.1/2"-1.5/8"
8	60539, 60541		1.13/16"-2"

