

BK Safety Hook The Original

Gunnebo Industries continuously works with product development and innovation to create the optimal solutions for each lifting situation. Since the early 1950's we have developed products that have become today's standards on the market. There is however only one original - Gunnebo Industries. With the original you get the perfect fit and smart details.

Back in 1965 Gunnebo Industries developed the BK hook. The mission was to increase the workplace safety of the construction industry. Today this popular and well known hook is the foundation of the innovative and much appreciated BK product family.



Clear markings

- Country of origin.
- Traceability codes.
- Model, size and grade.

Increased flexibility

- The eye design enables connection to not only G-links, but also C-links and Berglok.
- The design makes the BK hook suitable for steel wire ropes.

Flat section

- For attachment to other GrabIQ or wire components.

Heavy duty rivet

- Recessed rivet for a slim design.
- Decreases the risk of snagging.
- Ideal in narrow spaces.

Latch rotation stop

- Protects the trigger mechanism from damage.

Quality is top priority

- Fatigue tested.
- Forged alloy steel.
- Quenched and tempered.
- 100 % proof load of each BK hook.
- Full traceability back to the raw material.

Precision manufacturing

- Perfect fit between the parts.
- Increases safety during operation.

Replaceable trigger set

- Quick and easy assembly.
- Available as a complete spare part kit.

Recessed trigger

- To avoid the trigger from snagging or being damaged, it has been recessed into the body of the hook.
- Helps to prevent the latch from accidentally opening.


Fluorescent colour

- For high visibility in the field.



The BK Product Family


Four innovative hooks with smart details and perfect fit makes it easy to find the most suitable hook for every lifting operation.

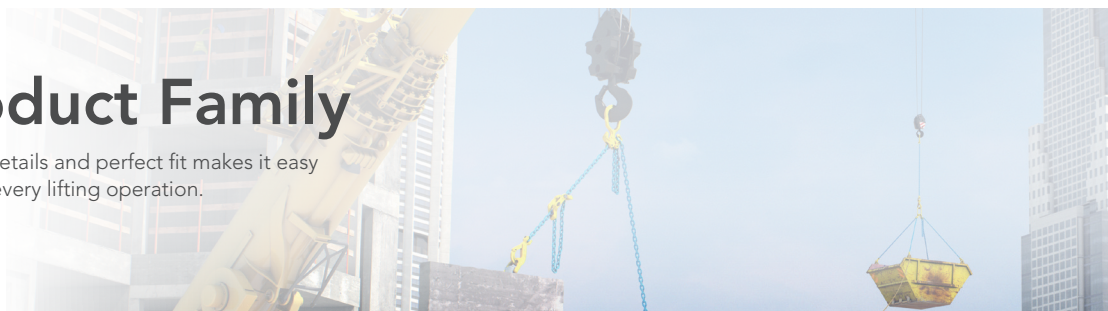

BK Eye

- The eye design enables connection to not only G-links, but also C-links, Bergloks and wire components.
- The design makes the BK hook suitable for both chain and steel wire ropes.
- Perfect fit between latch and hook.


Art. no.	Code	WLL tonnes*	A	L	B	E	F	G	H	Weight kgs
Z101108	BK-6-10	1.5	12	109	29	22	10	15	21	0.5
Z101097	BK-7/8-10	2.5	14	138	37	28	11	17	26	0.9
Z101024	BK-10-10	4.0	16	168	45	34	13	21	31	1.5
Z101032	BK-13-10	6.7	20	207	55	44	16	30	40	3.0
Z101040	BK-16-10	10.0	26	254	62	56	20	37	50	5.5
Z101089	BK-18/20-10	16.0	30	289	68	60	22	44	62	9.0
Z101325	BK-22-10	20.0	32	320	80	70	24	50	62	11.3
Z101326	BK-26-10	27.0	35	342	100	80	25	54	68	16.5
Z101357	BK-32-8	32.8	40	400	120	90	30	62	86	23.8



BKG Clevis

- Quick and easy assembly.
- Full mobility in the first chain link, $\pm 90^\circ$.
- Fool proof, only correct size of chain will fit.
- No need for coupling link, which makes the chain sling shorter and cost effective.


Art. no.	Code	WLL tonnes*	L	B	G	H	Weight kgs
Z101110	BKG-6-10	1.5	91	29	15	21	0.5
Z101098	BKG-7-10	2.0	120	37	17	22	0.5
Z101100	BKG-8-10	2.5	121	37	17	26	0.9
Z101026	BKG-10-10	4.0	144	45	21	31	1.5
Z101034	BKG-13-10	6.7	180	55	30	40	3.0
Z101042	BKG-16-10	10.0	219	62	37	50	5.5
Z101091	BKG-20-10	16.0	240	68	44	62	9.6



BKL Swivel

- Spacious swivel eye for a perfect fit with CL etc.
- Heavy duty bronze bearing.
- Castellated nut that is locked with double lock pins for a more robust and heavy duty design.
- The BKL hook can easily be turned into right position before load is lifted.


Art. no.	Code	WLL tonnes*	L	B	C	E	A	G	H	Weight kgs
Z101114	BKL-6-10	1.5	149	29	23	33	11	15	21	0.7
Z101104	BKL-7/8-10	2.5	183	37	27	38	12	17	26	1.2
Z101028	BKL-10-10	4.0	218	45	37	44	15	21	31	2.0
Z101036	BKL-13-10	6.7	282	55	49	48	19	30	40	4.0
Z101044	BKL-16-10	10.0	341	62	65	61	25	37	50	7.2
Z101093	BKL-18/20-10	16.0	368	68	70	72	31	44	62	11.4



BKLK Ball-bearing

- Heavy duty ball-bearing.
- Bearing protected by heavy duty housing.
- The BKLK hook makes it possible for the load to easily rotate during the lifting operation.

Art. no.	Code	WLL tonnes*	L	B	C	E	A	G	H	Weight kgs
Z101116	BKLK-6-10	1.5	149	29	24	33	11	15	21	0.7
Z101106	BKLK-7/8-10	2.5	183	37	27	38	12	17	26	1.2
Z101030	BKLK-10-10	4.0	218	45	35	44	15	21	31	2.0
Z101038	BKLK-13-10	6.7	280	55	45	48	19	30	40	4.0
Z101046	BKLK-16-10	10.0	339	62	62	61	25	37	50	7.3
Z101095	BKLK-18/20-10	16.0	368	68	60	72	31	44	62	11.5
Z101294	BKLK-22-10 OS	20.0	436	79	80	80	35	50	62	16.8
Z101295	BKLK-26-10 OS	27.0	486	100	110	102	45	54	68	26
Z101344	BKLK-32-8 OS	32.8	533	120	110	102	45	62	86	32.3

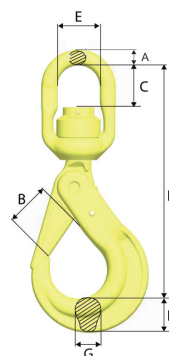

* Safety factor 4:1