


CLOSED SPELTER SOCKETS

QUENCHED AND TEMPERED CAST STEEL

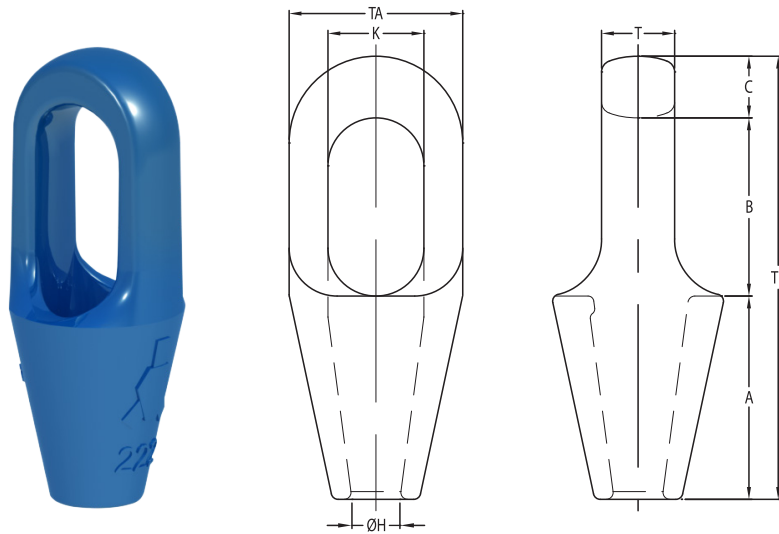

Model nr.	MBL (Mtons)	for wire ø		Strand ø		Dimensions (mm)								Weight (kg)
		(mm)	(inch)	(mm)	(inch)	A	B	C	øH	K	T	TA	TL	
CSS 296	8	6-7	$\frac{1}{4}$	-	-	50	40	11	9	22	13	37	101	0,3
CSS 297	12	8-10	$\frac{3}{8}$	-	-	57	48	14	13	25	18	43	119	0,4
CSS 298	20	11-13	$\frac{7}{16} - \frac{1}{2}$	-	-	64	59	17,5	15	30	23	51	140	0,7
CSS 299	25	14-16	$\frac{9}{16} - \frac{5}{8}$	13	$\frac{1}{2}$	76	65	21	18	36	26	67	162	1,4
CSS 200	40	18-19	$\frac{3}{4}$	14-16	$\frac{9}{16} - \frac{5}{8}$	89	78	27	22	42	32	76	194	2,2
CSS 201	55	20-22	$\frac{7}{8}$	18-19	$\frac{3}{4}$	101	90	33	25	47	38	92	224	3,8
CSS 204	75	23-26	1	20-22	$\frac{7}{8}$	114	103	36	29	57	44	104	253	5,4
CSS 207	90	27-30	$1\frac{1}{8}$	23-26	1	127	116	39	33	65	51	114	282	7
CSS 212	125	31-36	$1\frac{1}{4} - 1\frac{3}{8}$	27-28	$1\frac{1}{16} - 1\frac{1}{8}$	139	130	43	39	71	57	126	312	10
CSS 215	150	37-39	$1\frac{1}{2}$	30-32	$1\frac{3}{16} - 1\frac{1}{4}$	152	155	51	42	81	63	136	358	13
CSS 217	170	40-42	$1\frac{5}{8}$	33-35	$1\frac{5}{16} - 1\frac{3}{8}$	165	171	54	45	83	70	146	390	17
CSS 219	225	43-48	$1\frac{3}{4} - 1\frac{7}{8}$	36-40	$1\frac{7}{16} - 1\frac{5}{8}$	190	198	55	52	93	76	171	443	26
CSS 222	280	49-54	$2 - 2\frac{1}{8}$	42-45	$1\frac{5}{8} - 1\frac{3}{4}$	216	224	62	59	100	82	193	502	37
CSS 224	360	55-60	$2\frac{1}{4} - 2\frac{3}{8}$	46-48	$1\frac{13}{16} - 1\frac{7}{8}$	228	247	73	64	112	92	216	548	50
CSS 226	425	61-68	$2\frac{1}{2} - 2\frac{5}{8}$	50-54	$2 - 2\frac{1}{8}$	248	270	79	75	140	102	241	597	66
CSS 227	460	69-75	$2\frac{3}{4} - 2\frac{7}{8}$	56-62	$2\frac{1}{4} - 2\frac{1}{2}$	279	286	79	81	159	124	273	644	91
CSS 228	560	76-80	$3 - 3\frac{1}{8}$	64-67	$2\frac{1}{2} - 2\frac{5}{8}$	315	298	83	88	171	133	292	696	117
CSS 229	625	81-86	$3\frac{1}{4} - 3\frac{3}{8}$	69-76	$2\frac{3}{4} - 3$	330	311	102	92	184	146	311	743	125
CSS 230	720	87-93	$3\frac{1}{2} - 3\frac{5}{8}$	78-86	$3\frac{1}{16} - 3\frac{3}{8}$	356	330	102	99	197	159	330	788	176
CSS 231	875	94-102	$3\frac{3}{4} - 4$	88-96	$3\frac{7}{16} - 3\frac{3}{4}$	381	356	108	108	216	178	362	845	228
CSS 233	1200	108-115	$4\frac{1}{4} - 4\frac{1}{2}$	98-110	$3\frac{7}{8} - 4\frac{5}{16}$	450	425	125	129	235	190	405	1000	323
CSS 240	1400	120-130	$4\frac{3}{4} - 5$	112-124	$4\frac{7}{16} - 4\frac{7}{8}$	500	525	125	147	260	200	450	1150	447
CSS 245	1600	135-140	$5\frac{1}{4} - 5\frac{1}{2}$	125-132	$4\frac{15}{16} - 5\frac{3}{16}$	540	495	150	157	290	220	520	1185	645
CSS 250	2000	142-153	$5\frac{3}{4} - 6$	133-143	$5\frac{1}{4} - 5\frac{3}{8}$	585	530	170	171	305	240	545	1285	741
CSS 255	2220	154-165	$6\frac{1}{4} - 6\frac{1}{2}$	144-154	$5\frac{11}{16} - 6\frac{1}{4}$	630	565	175	185	330	250	575	1370	860
CSS 260	2500	166-178	$6\frac{3}{4} - 7$	155-166	$6\frac{1}{4} - 6\frac{3}{4}$	680	590	180	199	330	270	595	1450	985
CSS 265	2800	180-191	$7\frac{1}{4} - 7\frac{1}{2}$	167-179	$6\frac{9}{16} - 7\frac{1}{16}$	725	620	190	213	350	290	625	1535	1183
CSS 270	3200	192-204	$7\frac{3}{4} - 8$	180-191	$7\frac{1}{4} - 7\frac{1}{2}$	775	650	210	229	395	305	690	1635	1487

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- Socket range CSS296 until CSS200 is delivered with galvanized finish, other finishes are available upon request.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.



SEE OUR WARNING
& SAFETY INFORMATION