
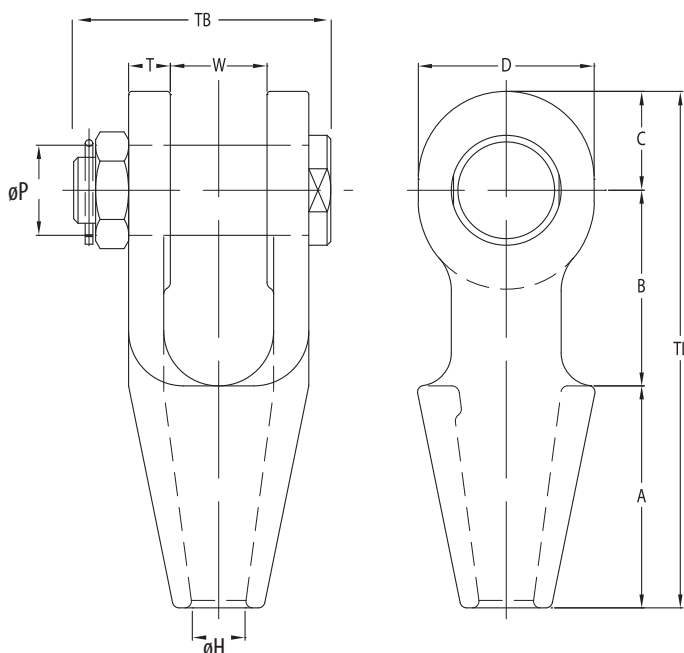


OPEN SPELTER SOCKETS JIS WITH BOLT

QUENCHED AND TEMPERED CAST STEEL

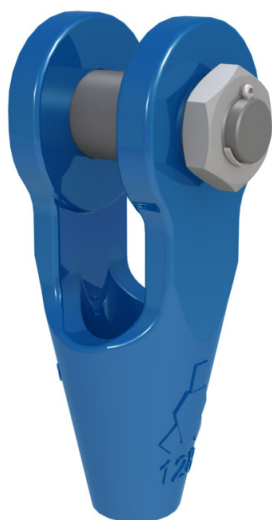

Model nr.	MBL (Mtons)	for wire ø		Dimensions (mm)										Weight (kg)
		(mm)	(inch)	A	B	C	D	øH	øP	T	TL	TB	W	
OSS 100-J20-B30	28	18-19	¾	89	76	40	70	21	30	16	205	107	38	3
OSS 104-J22-B34	35	20-22,4	7/8	101	89	45	80	24	34	19	235	123	44	4,4
OSS 108-J24-B37	41	23-26	1	114	101	60	104	28	37	22	275	138	51	8,2
OSS 108-J25-B40	52	23-26	1	114	101	60	104	28	40	22	275	138	51	8,2
OSS 111-J28-B43	56	27-30	1 ⅛	127	114	65	114	32	43	25	306	160	57	11,4
OSS 111-J30-B46	69	27-30	1 ⅛	127	114	65	114	32	46	25	306	160	57	11,6
OSS 115-J32-B48	69	31-36	1 ¼ - 1 ⅜	139	127	72	126	38	48	28	338	174	63	15
OSS 115-J34-B52	88	31-36	1 ¼ - 1 ⅜	139	127	72	126	38	52	28	338	174	63	15,2
OSS 118-J36-B56	94	35,5-39	1 ½	152	162	80	142	41	56	30	394	201	76	22

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.



SEE OUR WARNING
& SAFETY INFORMATION