


SHORT BOW SOCKETS

QUENCHED AND TEMPERED CAST STEEL

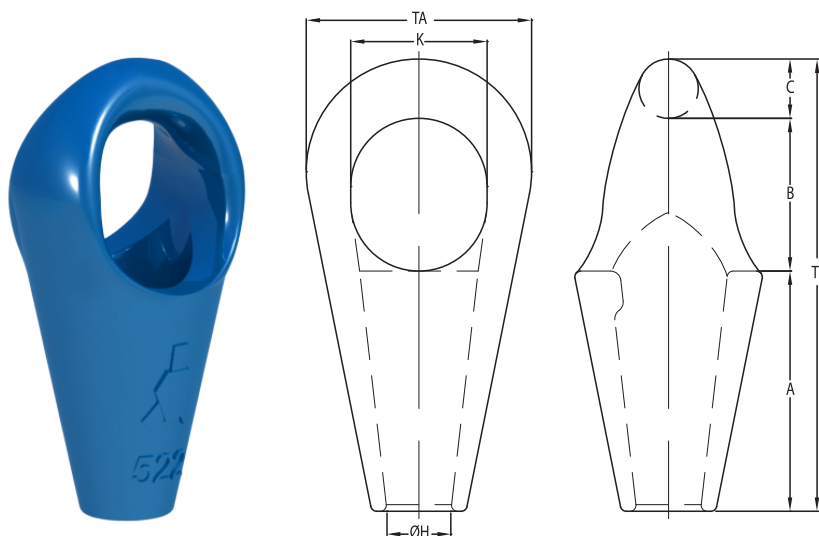

Model nr.	MBL (Mtons)	for wire ø		Dimensions (mm)							Weight (kg)
		(mm)	(inch)	A	B	C	øH	K	TA	TL	
SBS 512	140	31-36	1 1/4 - 1 3/8	141	83	38	39	75	132	262	7
SBS 517	160	37-42	1 1/2 - 1 5/8	162	103	40	44	92	152	305	10
SBS 519	200	43-48	1 3/4 - 1 7/8	188	120	48	51	112	178	356	16
SBS 522	250	49-54	2 - 2 1/8	204	132	54	59	120	200	390	21
SBS 524	320	55-60	2 1/4 - 2 3/8	230	148	62	64	135	220	440	28
SBS 526	400	61-68	2 1/2 - 2 5/8	265	165	68	73	150	250	498	44
SBS 527	500	69-75	2 3/4 - 2 7/8	287	178	75	79	164	274	540	53
SBS 528	600	76-80	3 - 3 1/8	314	195	76	89	175	295	585	70
SBS 529	700	81-86	3 1/4 - 3 3/8	327	216	82	92	194	320	625	81
SBS 530	800	87-93	3 1/2 - 3 5/8	358	220	92	99	202	350	670	112
SBS 531	900	94-102	3 3/4 - 4	365	235	100	108	215	375	700	130
SBS 533	1000	108-115	4 1/4 - 4 1/2	420	270	110	120	240	410	800	182

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.



SEE OUR WARNING
& SAFETY INFORMATION