

# WOODEN AND FIBERGLASS HAMMERS



EGA Master has renewed its range of **wooden and fiberglass handles** to satisfy the demand from the most professional user. **The handle-head fixation is reinforced in both handle types**, completely avoiding the disattachment of the head from the handle. Their manufacturing materials guarantee a durable use. For these reasons, EGA Master handles are a quality guarantee for industrial uses.



**1. High resistance special steel.**

**2. 50-58HRC in impact area (ISO 15601).**

**3. Grey hammer tone finishing.**

**4. Safety pin or conical go-through handle for perfect fixation handle-head.**

**5. Reinforced piece to avoid the breakage of the handle in its critical zone.**

**6. High quality wooden handle.**


**7. Conical wedge to improve the pressure distrution.**

**8. Ultra-resistant fiberglass.**

**9. Handle outer zone in PP and TPR: strength and adherence.**



## DEAD BLOW HAMMER




| COD.  | Lb  | L (mm) | Ø A (mm) | B (mm) |   |   |
|-------|-----|--------|----------|--------|---|---|
| 69748 | 0,5 | 275    | 40       | 80     | 6 | ● |
| 69750 | 1,5 | 325    | 50       | 110    |   |   |
| 69752 | 3   | 360    | 60       | 130    |   |   |
| 69753 | 4   | 425    | 65       | 140    |   |   |
| 69754 | 5   | 430    | 70       | 150    | 3 | - |
| 69755 | 6   |        | 75       | 165    |   |   |



The head is filled with Steel micro-beads which effectively absorb the impact and eliminate hammer rebound.

The housing, which is made of a mix of special rubber & PVC, enables the hammer to absorb impacts more effectively whilst still providing the necessary rigidity and resistance, but it also allows the hammering of metal parts without the risk of damage and breakage.

## GERMAN TYPE STONING HAMMER




| COD.  | Kg | L (mm) | A (mm) | B (mm) | C (mm) |   |
|-------|----|--------|--------|--------|--------|---|
| 69640 | 3  | 900    | 56     | 135    | 56     | 1 |
| 69641 | 4  |        | 61     | 145    | 64     |   |
| 69642 | 5  |        | 68     | 151    | 68     |   |
| 69643 | 6  |        | 70     | 165    | 70     |   |
| 69648 | 8  |        | 83     | 180    | 83     |   |
| 69655 | 10 |        | 86     | 200    | 86     |   |



### TECHNICAL SPECIFICATION

Hickory wood




| COD.  | Kg | L (mm) | A (mm) | B (mm) | C (mm) |   |
|-------|----|--------|--------|--------|--------|---|
| 69644 | 3  | 900    | 56     | 135    | 56     | 1 |
| 69645 | 4  |        | 61     | 145    | 64     |   |
| 69646 | 5  |        | 68     | 151    | 68     |   |
| 69647 | 6  |        | 70     | 165    | 70     |   |
| 69649 | 9  |        | 83     | 180    | 83     |   |
| 69677 | 10 |        | 86     | 200    | 86     |   |



### TECHNICAL SPECIFICATION

Fiberglass

## SLEDGE HAMMER




| COD.  | Lb | L (mm) | A (mm) | B (mm) | C (mm) |   |
|-------|----|--------|--------|--------|--------|---|
| 69650 | 4  | 400    | 51     | 136    | 48     | 4 |
| 69651 | 6  | 900    | 54     | 146    | 51     | 1 |
| 69652 | 8  |        | 58     | 161    | 59     |   |
| 69653 | 10 |        | 64     | 173    | 62     |   |
| 69654 | 12 |        | 66     | 180    | 66     |   |

For general hammering operations and especially for demolition work.

### TECHNICAL SPECIFICATION

Hickory wood



| COD.  | Lb | L (mm) | A (mm) | B (mm) | C (mm) |   |
|-------|----|--------|--------|--------|--------|---|
| 68530 | 4  | 400    | 51     | 136    | 48     | 1 |
| 68532 | 8  | 900    | 58     | 161    | 59     |   |
| 68533 | 10 |        | 64     | 173    | 62     |   |
| 68534 | 12 |        | 66     | 180    | 66     |   |


For general hammering operations and especially for demolition work.

### TECHNICAL SPECIFICATION

Fiberglass




## SPANISH TYPE STONING HAMMER



| COD.  | Kg  | L (mm) | A (mm) | B (mm) | C (mm) |   |   |
|-------|-----|--------|--------|--------|--------|---|---|
| 69659 | 0,7 | 260    | 33     | 105    | 33     | 6 | • |
| 69660 | 1   | 280    | 37     | 129    | 37     |   | - |
| 69661 | 1,4 |        | 41     | 138    | 43     |   | - |

### TECHNICAL SPECIFICATION

Hickory wood




| COD.  | Kg  | L (mm) | A (mm) | B (mm) | C (mm) |   |   |
|-------|-----|--------|--------|--------|--------|---|---|
| 69662 | 0,7 | 255    | 33     | 105    | 33     | 6 | • |
| 69663 | 1   | 280    | 37     | 129    | 37     | 4 | - |
| 69664 | 1,4 |        | 41     | 138    | 43     |   |   |

### TECHNICAL SPECIFICATION

Fiberglass



## GERMAN TYPE STONING HAMMER



| COD.  | Kg  | L (mm) | A (mm) | B (mm) | C (mm) |   |
|-------|-----|--------|--------|--------|--------|---|
| 69665 | 0,8 | 260    | 41     | 95     | 40     | 4 |
| 69605 | 1   | 260    | 41     | 95     | 40     | 4 |
| 69607 | 1,5 | 280    | 42     | 99     | 43     | 2 |

Designed for general hammering operations and for use with chisels and cold chisels.

### TECHNICAL SPECIFICATION

Hickory wood



| COD.  | Kg  | L (mm) | A (mm) | B (mm) | C (mm) |   |
|-------|-----|--------|--------|--------|--------|---|
| 69666 | 0,8 | 260    | 41     | 95     | 40     | 4 |
| 69667 | 1   | 260    | 41     | 95     | 40     | 4 |
| 69669 | 1,5 | 290    | 42     | 99     | 43     | 2 |


Designed for general hammering operations and for use with chisels and cold chisels.

### TECHNICAL SPECIFICATION

Fiberglass



## BRITISH TYPE STONING HAMMER




| COD.  | Lb  | L (mm) | A (mm) | B (mm) | C (mm) |   |
|-------|-----|--------|--------|--------|--------|---|
| 69671 | 2,5 | 280    | 45     | 92     | 45     | 1 |
| 69672 | 3   | 280    | 46     | 104    | 45     | 4 |

Designed for general hammering operations and for use with chisels and cold chisels.

### TECHNICAL SPECIFICATION

Hickory wood

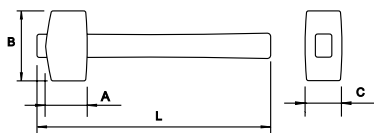

| COD.  | Lb  | L (mm) | A (mm) | B (mm) | C (mm) |   |
|-------|-----|--------|--------|--------|--------|---|
| 69673 | 2,5 | 280    | 45     | 92     | 45     | 1 |
| 69674 | 3   | 280    | 46     | 104    | 45     | 4 |


Designed for general hammering operations and for use with chisels and cold chisels.

### TECHNICAL SPECIFICATION

Fiberglass




## GERMAN TYPE MACHINIST'S HAMMER



| COD.  |  | L (mm) | A (mm) | B (mm) | C (mm) |  |  |
|-------|-----------------------------------------------------------------------------------|--------|--------|--------|--------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 69618 |                                                                                   | 275    | 20     | 96     | 21     | 6                                                                                 | ●                                                                                   |
| 69619 |                                                                                   | 305    | 23     | 103    | 23     |                                                                                   |                                                                                     |
| 69620 |                                                                                   | 325    | 27     | 118    | 28     |                                                                                   |                                                                                     |
| 69621 |                                                                                   | 325    | 29     | 123    | 31     |                                                                                   |                                                                                     |
| 69622 |                                                                                   | 340    | 33     | 128    | 32     |                                                                                   |                                                                                     |
| 69676 |                                                                                   | 355    | 37     | 135    | 37     |                                                                                   |                                                                                     |

### TECHNICAL SPECIFICATION

Hickory wood




| COD.  |  | L (mm) | A (mm) | B (mm) | C (mm) |  |  |
|-------|------------------------------------------------------------------------------------|--------|--------|--------|--------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 69731 |                                                                                    | 255    | 20     | 96     | 21     | 6                                                                                  | ●                                                                                    |
| 69732 |                                                                                    | 275    | 23     | 103    | 23     |                                                                                    |                                                                                      |
| 69733 |                                                                                    | 300    | 27     | 118    | 28     |                                                                                    |                                                                                      |
| 69734 |                                                                                    | 300    | 29     | 123    | 31     |                                                                                    |                                                                                      |
| 69735 |                                                                                    | 350    | 33     | 128    | 32     |                                                                                    |                                                                                      |
| 69737 |                                                                                    | 350    | 37     | 135    | 37     |                                                                                    |                                                                                      |

### TECHNICAL SPECIFICATION

Fiberglass



## JOINER'S HAMMER



| COD.  |  | L (mm) | A (mm) | B (mm) | C (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|--------|--------|--------|--------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69601 |                                                                                     | 270    | 18     | 88     | 17     | 6                                                                                   | ●                                                                                     |
| 69602 |                                                                                     | 270    | 20     | 93     | 19     |                                                                                     |                                                                                       |
| 69603 |                                                                                     | 300    | 22     | 97     | 23     |                                                                                     |                                                                                       |
| 69604 |                                                                                     | 300    | 25     | 107    | 24     |                                                                                     |                                                                                       |
| 69681 |                                                                                     | 310    | 28     | 116    | 27     |                                                                                     |                                                                                       |
| 69682 |                                                                                     | 310    | 30     | 121    | 29     |                                                                                     |                                                                                       |


The carpenters hammer head is formed with one squared end and one narrow end for use with small nails and pins, to reduce the risk of contact with fingers and causing damage to the work piece.

### TECHNICAL SPECIFICATION

Hickory wood



## JOINER'S HAMMER



| COD.  |  | L (mm) | A (mm) | B (mm) | C (mm) |  |  |
|-------|-----------------------------------------------------------------------------------|--------|--------|--------|--------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 69684 | 150                                                                               | 250    | 18     | 88     | 17     | 6                                                                                 | ●                                                                                   |
| 69685 | 200                                                                               |        | 20     | 93     | 19     |                                                                                   |                                                                                     |
| 69686 | 250                                                                               | 278    | 22     | 97     | 23     |                                                                                   |                                                                                     |
| 69687 | 350                                                                               |        | 25     | 107    | 24     |                                                                                   |                                                                                     |
| 69688 | 450                                                                               |        | 28     | 116    | 27     |                                                                                   |                                                                                     |
| 69689 | 550                                                                               |        | 30     | 121    | 29     |                                                                                   |                                                                                     |


The carpenters hammer head is formed with one squared end and one narrow end for use with small nails and pins, to reduce the risk of contact with fingers and causing damage to the work piece.

### TECHNICAL SPECIFICATION

Fiberglass




## FRENCH TYPE MACHINIST'S HAMMER



| COD.  |  | L (mm) | A (mm) | B (mm) | C (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|--------|--------|--------|--------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69691 | 250                                                                                 | 280    | 25     | 96     | 25     | 6                                                                                   | ●                                                                                     |
| 69692 | 375                                                                                 | 300    | 30     |        | 30     |                                                                                     |                                                                                       |
| 69693 | 675                                                                                 | 350    | 35     | 102    | 35     |                                                                                     |                                                                                       |
| 69694 | 900                                                                                 |        | 40     | 116    | 40     |                                                                                     |                                                                                       |
| 69695 | 1100                                                                                |        | 45     | 124    | 45     |                                                                                     |                                                                                       |

### TECHNICAL SPECIFICATION

Hickory wood




| COD.  |  | L (mm) | A (mm) | B (mm) | C (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|--------|--------|--------|--------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69738 | 250                                                                                 | 270    | 25     | 96     | 25     | 6                                                                                   | ●                                                                                     |
| 69739 | 375                                                                                 | 300    | 30     |        | 30     |                                                                                     |                                                                                       |
| 69740 | 675                                                                                 | 350    | 35     | 102    | 35     |                                                                                     |                                                                                       |
| 69741 | 900                                                                                 |        | 40     | 116    | 40     |                                                                                     |                                                                                       |
| 69756 | 1100                                                                                |        | 45     | 124    | 45     |                                                                                     |                                                                                       |

### TECHNICAL SPECIFICATION

Fiberglass



## BALL PEIN HAMMER




| COD.  |  | Mod. | L (mm) | Ø A (mm) | Ø B (mm) | C (mm) |  |  |
|-------|-----------------------------------------------------------------------------------|------|--------|----------|----------|--------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 69612 | 250                                                                               | A    | 280    | 23       | 22       | 80     | 1                                                                                  | ●                                                                                   |
| 69613 | 350                                                                               | B    | 300    | 30       | 27       | 94     |                                                                                    |                                                                                     |
| 69614 | 500                                                                               | C    | 320    | 32       | 28       | 104    |                                                                                    |                                                                                     |
| 69616 | 700                                                                               | E    | 340    | 32       | 30       | 118    |                                                                                    |                                                                                     |
| 69617 | 1000                                                                              | F    | 370    | 39       | 32       | 127    |                                                                                    |                                                                                     |

For the hammering of metal and steel, rivets, welds etc.

### TECHNICAL SPECIFICATION

Hickory wood



| COD.  |  | Mod. | L (mm) | Ø A (mm) | Ø B (mm) | C (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|------|--------|----------|----------|--------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69704 | 250                                                                                 | A    | 270    | 23       | 22       | 80     | 1                                                                                    | ●                                                                                     |
| 69705 | 350                                                                                 | B    | 300    | 30       | 27       | 94     |                                                                                      |                                                                                       |
| 69706 | 500                                                                                 | C    | 320    | 32       | 28       | 104    |                                                                                      |                                                                                       |
| 69758 | 600                                                                                 | D    | 340    | 32       | 30       | 118    |                                                                                      |                                                                                       |
| 69707 | 700                                                                                 | E    |        | 39       | 32       | 127    |                                                                                      |                                                                                       |
| 69708 | 1000                                                                                | F    |        | 39       | 32       | 127    |                                                                                      |                                                                                       |


For the hammering of metal and steel, rivets, welds etc.

### TECHNICAL SPECIFICATION

Fiberglass



## SPANISH TYPE CLAW HAMMER



| COD.  |  | L (mm) | A (mm) | B (mm) | C (mm) | D (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69711 | 300                                                                                 | 380    | 23     | 129    | 8      | 26     | 6                                                                                    | ●                                                                                     |
| 69712 | 400                                                                                 | 400    | 29     | 141    | 12     | 29     |                                                                                      |                                                                                       |
| 69713 | 500                                                                                 |        |        | 142    |        |        |                                                                                      |                                                                                       |

The spanish type claw hammer is characterised by having a head with a large striking area combined with a lever-shape to facilitate the removal of nails and general dismantling.


The sharp claws enable easier assembly and dismantling of jobs.

### TECHNICAL SPECIFICATION

Hickory wood



## SPANISH TYPE CLAW HAMMER



| COD.  |  | L (mm) | A (mm) | B (mm) | C (mm) | D (mm) |  |  |
|-------|-----------------------------------------------------------------------------------|--------|--------|--------|--------|--------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 69715 | 300                                                                               | 385    | 23     | 129    | 8      | 26     | 6                                                                                  | ●                                                                                   |
| 69716 | 400                                                                               |        | 29     | 141    | 12     | 29     |                                                                                    |                                                                                     |
| 69717 | 500                                                                               |        |        | 142    |        |        |                                                                                    |                                                                                     |

The spanish type claw hammer is characterised by having a head with a large striking area combined with a lever-shape to facilitate the removal of nails and general dismantling.


The sharp claws enable easier assembly and dismantling of jobs.

### TECHNICAL SPECIFICATION

Fiberglass



## CLAW HAMMER




| COD.  |  | L (mm) | Ø A (mm) | B (mm) | C (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|--------|----------|--------|--------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69742 | 600                                                                                 | 330    | 34       | 145    | 7      | 6                                                                                    | ●                                                                                     |

Principally used for hammering, nailing or the removal of nails and other objects. Generally this hammer is associated with woodworking, but it can also be used with iron, aluminium and other diverse materials.

### TECHNICAL SPECIFICATION

Hickory wood




| COD.  |  | L (mm) | Ø A (mm) | B (mm) | C (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|--------|----------|--------|--------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69719 | 550                                                                                 | 330    | 30       | 138    | 7      | 6                                                                                    | ●                                                                                     |

Principally used for hammering, nailing or the removal of nails and other objects. Generally this hammer is associated with woodworking, but it can also be used with iron, aluminium and other diverse materials.

### TECHNICAL SPECIFICATION

Fiberglass



| COD.  | Oz. | L (mm) | A (mm) | B (mm) | C (mm) | D (mm) |  |  |
|-------|-----|--------|--------|--------|--------|--------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69680 | 16  | 338    | 29     | 130    | 8      | 29     | 6                                                                                    | ●                                                                                     |


The claw hammer with a forged handle, offers excellent features including a non-slip ergonomic handle for a better grip and easy handling.

### TECHNICAL SPECIFICATION

Forged handle



## AMERICAN CLAW HAMMER




| COD.  |  | (mm) | L (mm) | Ø A (mm) | B (mm) | C (mm) |  |  |
|-------|-----------------------------------------------------------------------------------|------|--------|----------|--------|--------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 69679 | 250                                                                               | 21   | 280    | 23       | 102    |        |                                                                                    |                                                                                     |
| 69608 | 350                                                                               | 23   | 300    |          | 111    | 6      |                                                                                    |                                                                                     |
| 69609 | 450                                                                               | 25   |        | 25       | 128    |        | 6                                                                                  | •                                                                                   |
| 69610 | 525                                                                               | 27   | 320    | 27       | 132    | 7      |                                                                                    |                                                                                     |
| 69611 | 600                                                                               | 29   |        | 28       | 136    | 9      |                                                                                    |                                                                                     |

For hammering operations including nailing and for the dismantling of wooden constructions.

### TECHNICAL SPECIFICATION

Hickory wood



| COD.  |  | (mm) | L (mm) | Ø A (mm) | B (mm) | C (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|------|--------|----------|--------|--------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69743 | 250                                                                                 | 21   | 300    | 23       | 102    |        |                                                                                      |                                                                                       |
| 69744 | 350                                                                                 | 23   |        |          | 111    | 6      |                                                                                      |                                                                                       |
| 69745 | 450                                                                                 | 25   | 330    | 25       | 128    |        | 6                                                                                    | •                                                                                     |
| 69746 | 525                                                                                 | 27   |        | 27       | 132    | 7      |                                                                                      |                                                                                       |
| 69747 | 600                                                                                 | 29   | 380    | 28       | 136    | 9      |                                                                                      |                                                                                       |

For hammering operations including nailing and for the dismantling of wooden constructions.

### TECHNICAL SPECIFICATION

Fiberglass



## ENGINEER'S CROSS PEIN HAMMER



| COD.  |  | L (mm) | Ø A (mm) | B (mm) | C (mm) | D (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|--------|----------|--------|--------|--------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69700 | 200                                                                                 | 300    | 20       | 5      | 104    | 22     |                                                                                      |                                                                                       |
| 69701 | 250                                                                                 |        | 22       |        | 117    | 26     | 6                                                                                    | •                                                                                     |
| 69702 | 350                                                                                 | 320    | 25       | 6      | 118    |        |                                                                                      |                                                                                       |


They are used in the forging process and are commonly used by blacksmiths, mechanics, etc.

### TECHNICAL SPECIFICATION

Hickory wood



## CHIPPING HAMMER



| COD.  |  | L (mm) | A (mm) | B (mm) | C (mm) | D (mm) |  |  |
|-------|-----------------------------------------------------------------------------------|--------|--------|--------|--------|--------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 69678 | 500                                                                               | 320    | 27     | 150    | 27     | 27     | 6                                                                                  | ●                                                                                   |


To clean weld points.

### TECHNICAL SPECIFICATION

Hickory wood



## NYLON HAMMER



| COD.  |  | L (mm) | A (mm) | B (mm) |  |  |  |  |
|-------|-----------------------------------------------------------------------------------|--------|--------|--------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 55325 | 235                                                                               | 290    | 26     | 80     | 6                                                                                 | ●                                                                                 | 84210                                                                             | 85426                                                                               |
| 55326 | 340                                                                               | 310    | 30     | 85     |                                                                                   |                                                                                   | 84211                                                                             | 85427                                                                               |
| 55327 | 490                                                                               | 315    | 35     | 95     |                                                                                   |                                                                                   | 84212                                                                             | 85428                                                                               |


They are hammers that are used in order to damage and mark as little as possible the surfaces on which they are hit.

### TECHNICAL SPECIFICATION

Hickory wood



## BLACK RUBBER MALLET



| COD.  |  | L (mm) | Ø A (mm) | B (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|--------|----------|--------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69520 | 340                                                                                 | 320    | 60       | 100    | 2                                                                                   | ●                                                                                     |
| 69521 | 450                                                                                 | 340    | 65       | 115    |                                                                                     |                                                                                       |
| 69726 | 900                                                                                 | 350    | 80       | 125    |                                                                                     |                                                                                       |


Special for tiling jobs and for general adjustment uses.

### TECHNICAL SPECIFICATION

Hickory wood



## SQUARE COPPER MALLET



| COD.  |  |  O.D.<br>mm | L (mm) | A (mm) | B (mm) | C (mm) |  |  |
|-------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------|--------|--------|--------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 69728 | 500                                                                                 | 30                                                                                             | 240    | 26     | 77     | 29     | 6                                                                                    | ●                                                                                     |
| 69729 | 1000                                                                                | 35                                                                                             | 260    | 36     | 88     | 39     | 4                                                                                    |                                                                                       |
| 69730 | 1500                                                                                | 40                                                                                             | 280    | 41     | 99     | 43     |                                                                                      |                                                                                       |


For hammering and shaping without causing damage to the actual work piece. Copper is a soft material that conducts heat and electricity well but does not produce sparks. Ideal for the oil industry, metal mining, coal mining, oil extraction, etc.

### TECHNICAL SPECIFICATION

Hickory wood



## PICKS




| COD.         |  | L (mm) | A (mm) | B (mm) | C (mm) | D (mm) |  |  |
|--------------|-----------------------------------------------------------------------------------|--------|--------|--------|--------|--------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>69759</b> | 400                                                                               | 380    | 229    | 39     | 5      | 34     | 6                                                                                  | •                                                                                   |
| <b>69760</b> | 500                                                                               |        | 260    | 41     | 6      | 35     |                                                                                    |                                                                                     |

For hammering operations. Surface breaking and scraping.

### TECHNICAL SPECIFICATION

Hickory wood



| COD.         |  | L (mm) | A (mm) | B (mm) | C (mm) | D (mm) |  |  |
|--------------|------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>69762</b> | 400                                                                                | 385    | 229    | 39     | 5      | 34     | 6                                                                                   | •                                                                                    |
| <b>69761</b> | 500                                                                                |        | 237    | 41     | 6      | 35     |                                                                                     |                                                                                      |

For hammering operations. Surface breaking and scraping.

### TECHNICAL SPECIFICATION

Fiberglass




| COD.         |  | L (mm) | A (mm) | B (mm) |  |
|--------------|-------------------------------------------------------------------------------------|--------|--------|--------|---------------------------------------------------------------------------------------|
| <b>69765</b> | 500                                                                                 | 380    | 240    | 38     | 6                                                                                     |

For hammering operations. Surface breaking and scraping.

### TECHNICAL SPECIFICATION

Hickory wood



| COD.         |  | L (mm) | A (mm) | B (mm) |  |
|--------------|-------------------------------------------------------------------------------------|--------|--------|--------|---------------------------------------------------------------------------------------|
| <b>69766</b> | 400                                                                                 | 385    | 236    | 36     | 6                                                                                     |
| <b>69767</b> | 500                                                                                 |        | 240    | 38     |                                                                                       |


For hammering operations. Surface breaking and scraping.

### TECHNICAL SPECIFICATION

Fiberglass



## PICKS




| COD.         |  | L (mm) | A (mm) | B (mm) | C (mm) | D (mm) |  |
|--------------|-----------------------------------------------------------------------------------|--------|--------|--------|--------|--------|-------------------------------------------------------------------------------------|
| <b>69770</b> | 400                                                                               | 380    | 237    | 10     | 10     | 36     | 6                                                                                   |
| <b>69771</b> | 500                                                                               |        | 197    | 24     | 35     | 25     |                                                                                     |

For hammering operations. Surface breaking and scraping.

### TECHNICAL SPECIFICATION

Hickory wood



| COD.         |  | L (mm) | A (mm) | B (mm) | C (mm) | D (mm) |  |
|--------------|-------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|---------------------------------------------------------------------------------------|
| <b>69772</b> | 400                                                                                 | 385    | 237    | 10     | 10     | 36     | 6                                                                                     |

For hammering operations. Surface breaking and scraping.

### TECHNICAL SPECIFICATION

Fiberglass



# PRECAUTIONARY MEASURES

## INSPECTION AND RECOMMENDATIONS FOR USE



### INSPECTION

Do not use a hammer with a damaged handle or reinforced with ropes or wires.



Before using a hammer, make sure that the handle is perfectly attached to the head. In conical shank, well set head; in rest, resin, wedge and pin in good condition. In those that incorporate a safety pin, its function is that when the head loses its grip, it does not fly off. Your role is not to continue working with her. As soon as the slack in the head is noticed, its use should be discarded.



Select a hammer of suitable size and hardness for each of the surfaces to be struck.




Do not use hammers with a loose head, loose wedge, or damaged resin.



### RECOMMENDATIONS FOR USE


Note that the piece to be hit rests on a solid base to avoid rebounding. Try to hit the impact surface with the entire face of the hammer.




Hold the handle by the end around its entire perimeter.



In the case of having to strike nails, they must be held by the head and not by the end.

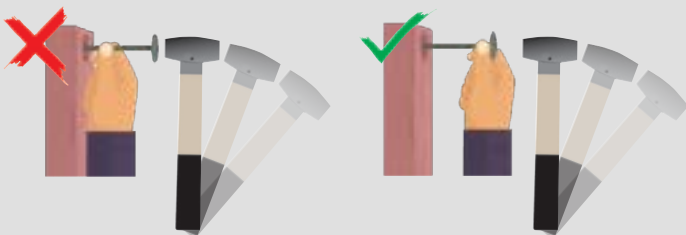

Do not use a hammer to strike another, another auxiliary tool, or as a lever.

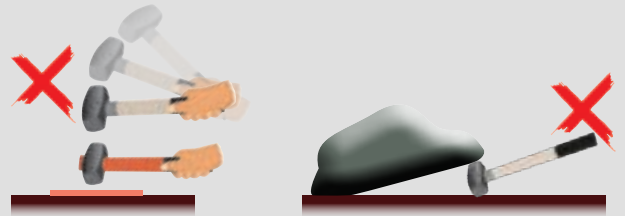

Do not hit with the side of the hammer head.



Use approved safety glasses.

