

BK Safety Hook

The Original

Gunnebo Industries continuously works with product development and innovation to create the optimal solutions for each lifting situation. Since the early 1950's we have developed products that have become today's standards on the market. There is however only one original - Gunnebo Industries. With the original you get the perfect fit and smart details.

Back in 1965 Gunnebo Industries developed the BK hook. The mission was to increase the workplace safety of the construction industry. Today this popular and well known hook is the foundation of the innovative and much appreciated BK product family.



Clear markings

- Country of origin.
- Traceability codes.
- Model, size and grade.

Increased flexibility

- The eye design enables connection to not only G-links, but also C-links and Berglok.
- The design makes the BK hook suitable for steel wire ropes.

Flat section

- For attachment to other GrabiQ or wire components.

Heavy duty rivet

- Recessed rivet for a slim design.
- Decreases the risk of snagging.
- Ideal in narrow spaces.

Latch rotation stop

- Protects the trigger mechanism from damage.

Quality is top priority

- Fatigue tested.
- Forged alloy steel.
- Hardened and tempered.
- Every hook is individually proof-loaded at 2,5 x WLL.
- Full traceability back to the raw material.

Precision manufacturing

- Perfect fit between the parts.
- Increases safety during operation.

Fluorescent color

- For high visibility in the field.



Replaceable trigger set

- Quick and easy assembly.
- Available as a complete spare part kit.

Recessed trigger

- To avoid the trigger from snagging or being damaged, it has been recessed into the body of the hook.
- Helps to prevent the latch from accidentally opening.


Safety Hook BK

The "original" safety hook with eye connector.

Art. no.	Code	WLL tonnes*	A	L	B	E	F	G	H	Weight kg
Z101108	BK-6-10	1.5	12	109	29	22	10	15	21	0.5
Z101097	BK-7/8-10	2.6	14	138	37	28	11	17	26	0.9
Z101024	BK-10-10	4.0	16	168	45	34	13	21	31	1.5
Z101032	BK-13-10	6.8	20	207	55	44	16	30	40	3.0
Z101040	BK-16-10	10.3	26	254	62	56	20	37	50	5.5
Z101089	BK-18/20-10	16.0	30	289	68	60	22	44	64	9.0
Z101325	BK-22-10	20.0	32	320	80	70	24	50	64	11.3
Z101326	BK-26-10	27.3	35	342	100	80	25	54	68	16.5

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M-02 and AS 3776:2015.

For larger sizes, see Classic Grade 8.




Safety Hook BKD

Double latch BK-hook with recessed trigger. Should the first hook latch accidentally open, either through direct impact or excessive wear on the trigger, the extra latch is there to retain the load safely. The secondary latch is designed to be easily operated and will not cause inconvenience for the operator.


Art. no.	Code	WLL tonnes*	A	L	B	E	F	G	H	Weight kg
Z101154	BKD-13-10	6.8	20	207	44	44	16	30	40	3.2
Z101155	BKD-16-10	10.3	26	254	48	56	20	37	50	5.8
Z101156	BKD-18/20-10	16.0	30	289	52	60	22	46	62	9.1

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M-02 and AS 3776:2015.

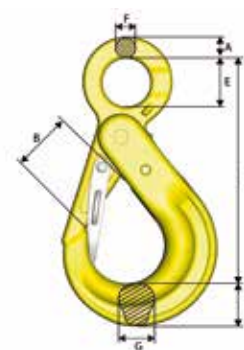

Double latch

Should the hook latch accidentally open, either through direct impact or excessive wear on the trigger, the extra latch is there to retain the load safely. The extra latch is designed to be easily operated.



Shank Safety Hook BKT

Safety hook with shank for customized machines.

Art. no.	Code	WLL tonnes*	L	B	L1	D	dmin	G	H	Weight kg
Z1011120	BKT-6-10	1.5	90	29	36	20	11	15	21	0.5
Z1011020	BKT-7/8-10	2.6	111	37	47	24	13	17	26	0.9
Z1010690	BKT-10-10	4.0	133	45	51	29	16	21	31	1.6
Z1010710	BKT-13-10	6.8	160	55	77	34	20	30	39	3.0

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M-02 and AS 3776:2015.

d min = the smallest permitted shank dimension after machining.

Note! After machining of the shank, proof loading must be carried out.

